


APPLICATION		REVISION			
NEXT ASSY	USED ON	LTR	DESCRIPTION	DATE	APPROVED
	AH-H63				

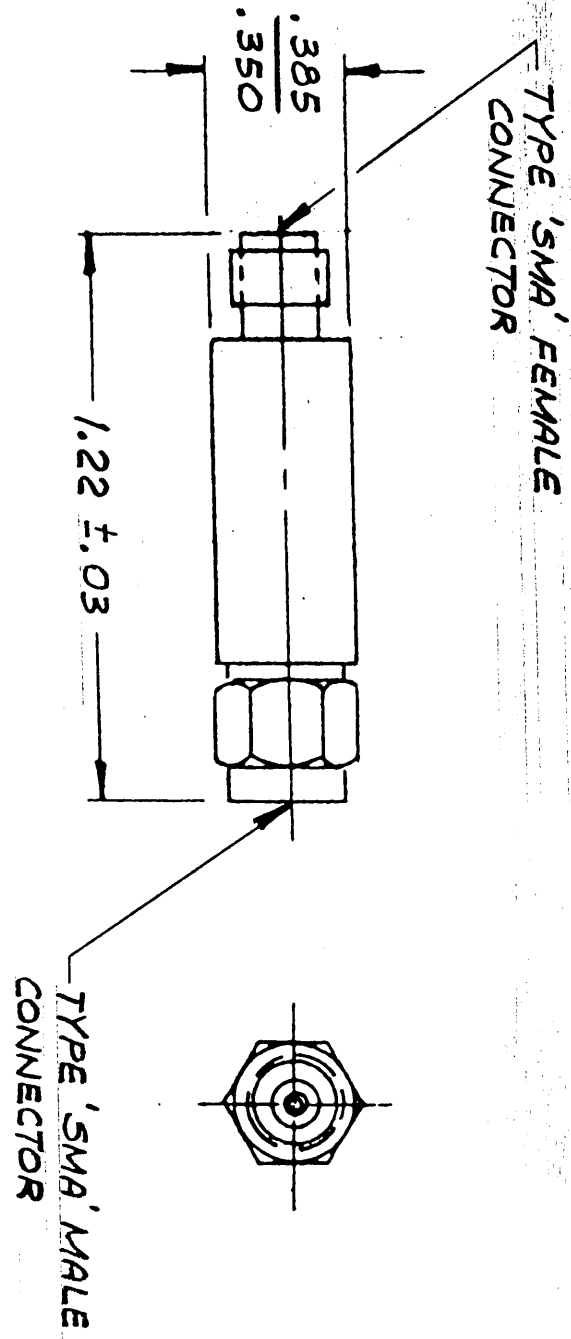

ELECTRICAL SPECIFICATIONS

ATTENUATION:

DC - 18.0 GHz _____ 12.0 DB ± 0.75 DB

VSWR:

DC - 4.0 GHz _____ 1.15 : 1 MAX

4.0 - 12.4 GHz _____ 1.30 : 1 MAX

12.4 - 18.0 GHz _____ 1.35 : 1 MAX

NOTICE: THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MICROLAB AND SHALL NOT BE REPRODUCED, OR COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION.

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES ARE: ON DECIMALS .XX ± .01 ANGLES ± FRACTIONS ± 1/64 SURFACE FINISH MSP NO. APPLIES

MATERIAL:

DRAWN	M.M.	12-2-88
CHECKED		
E. E. APPV.	<i>[Signature]</i>	1/5/88
M. E. APPV.		
Q. A. APPV.	<i>[Signature]</i>	1/5/88

MICROLAB/FXR
LIVINGSTON, N. J.

ATTENUATOR, FIXED

SIZE	CODE IDENT. NO.	
A	00929	AH-H63
SCALE	NONE	SHEET 1 OF 1