


- ◆ Injects Tetra, LMR/P25, GSM-850, etc., to other 1710 - 2700 MHz bands
- ◆ **Models for Outdoor Environments**
- ◆ Low Passive IM., PIM
- ◆ High Input Isolation
- ◆ High Average Power
- ◆ Minimal RF Insertion Loss
- ◆ Rugged, High Reliability, RoHS

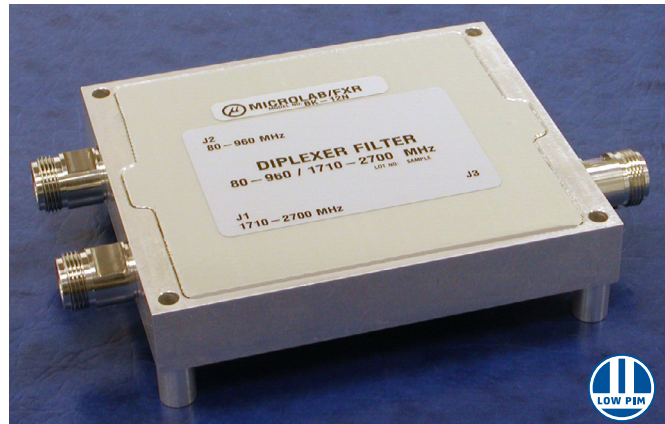

Model Number	Connectors (female)	Weight. nom. lb (kg)
<b>BK-12D</b>	7-16 mm	1.4 (0.65)
<b>BK-12N</b>	N	1.2 (0.55)

Add 'P' to Model Number for Outdoor Use

	Pass Band MHz	*DC Path to J3	Pass Band Loss	Power Rating Avg., peak
Input J2	80 - 960	2A max	<0.3 dB	120W max, 3kW
Input J1	1710 - 2700	Isolated	<0.5 dB	120W max, 3kW

\*DC path: DC to 20 MHz

Microlab Model BK-12 series is a Diplexer which allows combination and separation of signals in the 80 - 960 MHz and 1710 - 2700 MHz wireless bands. To minimize band inter-reaction, the inputs are well isolated and have minimal insertion loss over their respective frequency bands. Attention to mechanical design ensures low passive intermodulation. The Diplexer is designed using passive, proprietary techniques for low loss and high reliability.

Connectors, spaced to allow controlled wrench tightening, are available with alternate genders. For outdoor environments add the suffix 'P' to Model No. (e.g. **BK-12NP**). (08/14)

Input Isolation: >50 dB  
 Input J1/J2 VSWR: <1.2:1  
 Peak Power Rating: 3 kW peak  
 Impedance: 50Ω nominal  
 Intermod. (PIM): <-150 dBc  
 2 x +43dBm tones

Environment: -35 to +65°C

Housing Finish:  
 Indoor/IP64: Standard model  
 Passivated Al.  
 Outdoor/IP67: Painted  
 Add P to Model No.

Connectors: Triplate

