

- ◆ Low PIM Performance using Cable Load
- ◆ Weathersealed Design, IP67
- ◆ High Reliability
- ◆ Multiple Connector Options
- ◆ High Isolation, Low VSWR and Loss
- ◆ 160 W Total Average Power Rating
- ◆ RoHS compliant



The models in the CTseries are assemblies of a broadband, high isolation Hybrid Coupler and a low PIM cable load using a single weatherproofed housing.

The Combiner combines two wireless carriers in the band to a single antenna feed or distribution cable with minimum intermodulation. The cable load terminates one hybrid output port in 50 Ω and results in a 3 dB loss in each signal.

All models include right angle mounting brackets. See outline drawing for details.

Coupling Loss:	3 dB nominal
PIM Intermod:	-161 dBc (all units tested at 1850 MHz with 2 +43dBm tones)
AISG/DC Continuity:	Input B, 2.0A max.
Impedance:	50 Ω nominal
Environment:	-35°C to +75°C, IP67
Housing:	Passivated aluminum
Connector Finish:	Triplate
Weight, nominal:	6.6 lbs; 3.0 kg

Model No.	Connectors	Frequency Range, MHz	Input Isolation, dB typ. min.	Sensitivity dB	VSWR Max	Dissipative Loss	Total Max. †Avg.	Power Peak
CT-84D	7-16 (f)	694 - 2170 2400 - 2700	30 25 25 21	± 0.40	1.2:1	<0.2 dB	160W	3.0 kW
CT-84N	N type (f)	694 - 2170 2400 - 2700	30 25 27 23	± 0.40	1.2:1	<0.2 dB	160W	3.0 kW
CT-84C	*4.1-9.5 (f)	694 - 2170 2400 - 2700	30 25 25 21	± 0.40	1.2:1	<0.2 dB	160W	3.0 kW
CT-84E	4.3-10 (f)	694 - 2170 2400 - 2700	30 25 25 21	± 0.40	1.2:1	<0.2 dB	160W	3.0 kW

*Mini-DIN Connectors

†Derate -1.2%/°C.above 55°C

Note: Specifications are subject to change without prior notification.


06JUN2016



Model CT-84D



CT-84N Outline

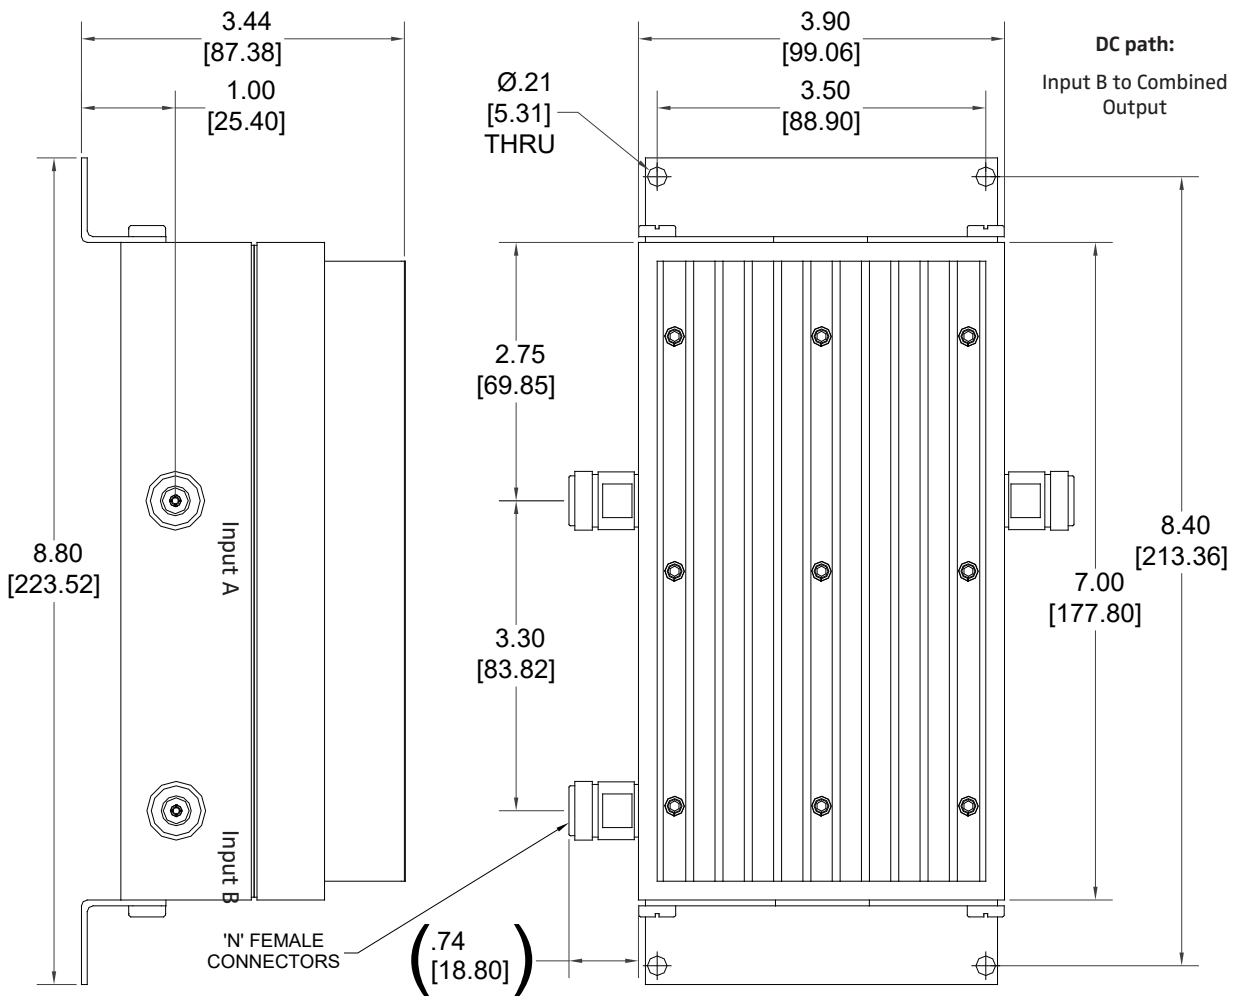

Brackets Included