


- ◆ Injects Tetra or LMR/P25 to all other 698 - 2700 bands
- ◆ **Models for Outdoor Environments**
- ◆ High Input Isolation
- ◆ High Average Power
- ◆ Meets European Rail Standard EN50155:2001 (Class T1)
- ◆ Rugged, High Reliability, RoHS
- ◆ Low Passive IM., PIM
- ◆ Low Cost Design

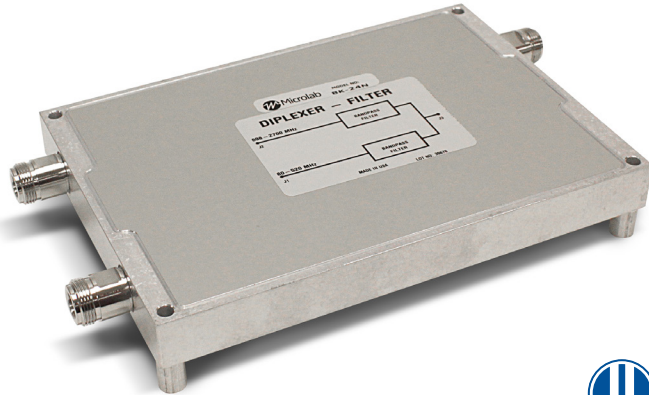


Model Number	Connectors (female)	Weight, nom. lb (kg)
BK-24D	7-16 mm	2.2 (1.0)
BK-24N	N	1.9 (0.8)
BK-24E	4.3-10	1.9 (0.8)
Add 'P' to Model Number for Outdoor Use		

	Pass Bands, MHz	Input Isolation	Pass Band Loss	Power Rating Avg, peak
Input P1	80 - 520	>50 dB	<0.3 dB	50W., 3 kW
	698 - 800	>40 dB		
Input P2	800 - 2500	>50 dB	<0.5 dB	120W., 3 kW
	2500 - 2700	>30 dB		

Input J1/J2 VSWR: <1.35:1, <1.30 typical except <1.60:1 960-1500 MHz
 Impedance: 50Ω nominal
 Intermod. (PIM): -161 dBc
 2 x +43dBm tones
 Environment: -35 to +65°C
 Housing Finish:
 Indoor/IP64: Standard model
 Passivated Al.
 Outdoor/IP67: Painted
 Add P to Model No.
 Connectors: Triplate

Microlab Model BK-24 series is a Diplexer which allows combination and separation of signals in the 80 - 520 MHz and 698 - 2700 MHz wireless bands. To minimize band inter-reaction, the inputs are well isolated and have minimal insertion loss over their respective frequency bands. The Diplexer is designed using passive, proprietary techniques for low loss, low PIM and high reliability

For use in outdoor environments add the suffix 'P' to Model No. (e.g. BK-24NP).

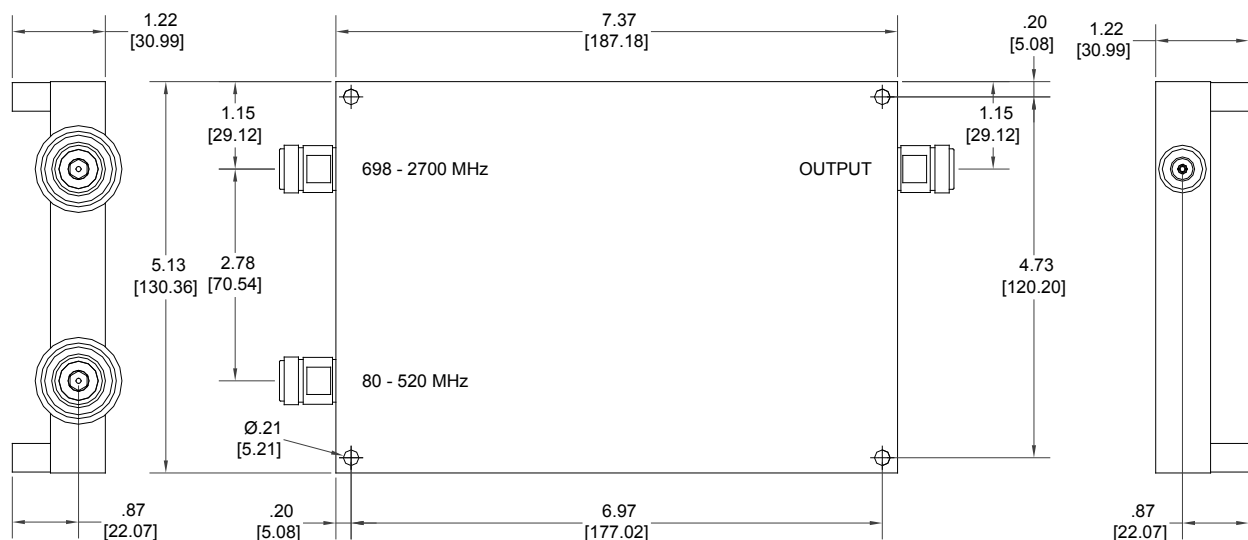

Note: Specifications are subject to change without prior notification.

11FEB2016