REVISION			
LTR	DESCRIPTION	DATE	APPROV'D

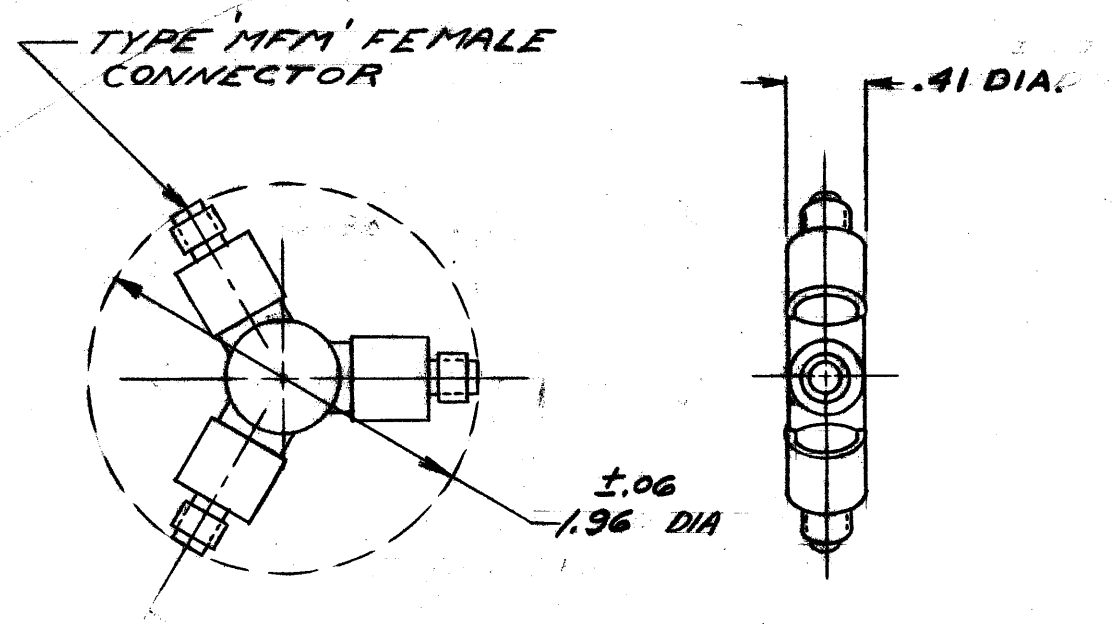

ELECT. SPECS.

IMPEDANCE	50 OHMS
VSWR: DC-12.4 GHz	1.50 MAX.
12.4-18.0 GHz	1.90 MAX.
RESISTIVE LOSS (NOMINAL)	3db
LOAD ISOLATION (NOMINAL)	6db

NOTICE: THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF MICROLAB AND SHALL NOT BE REPRODUCED, OR COPIED, OR USED AS THE BASIS FOR THE MANUFACTURE OR SALE OF APPARATUS WITHOUT PERMISSION.

FINISH: ———

NEXT ASSY	USED ON
APPLICATION	

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES, TOLERANCES ARE: ON DECIMALS .XX ± .01 .XXX ± .005 FRACTIONS ± 1/64 ANGLES ± °
SURFACE FINISH ✓ MSP NO. APPLIES

MATERIAL: ———

DRAWN	A. CARBONELLI
CHECKED	FAS
E. E. APPV.	4-10-68
M. E. APPV.	4-9-68
Q. A. APPV.	R.W.D. 4/9/68
DATE	4-1-68
REF.	

MICROLAB/FXR
LIVINGSTON, N. J.

POWER DIVIDER
OUTLINE

SIZE	CODE IDENT. NO.	
B	00929	DA-2FF

SCALE FULL | SHEET 1 OF 1

FORM MDS-2001-3
9-64